

FICHE TECHNIQUE


LED Solaire Tout En Un Lampadaire de rue de 20W, IP65




Description:

Model NO.	CK-SA20-AS		
Wattage:	20W		
Lumen Output:	2600lm ± 5%		
Solar panel power:	15W/10V		
Installation height:	3-5 meters		
Installation distance:	4-6 meters		
Battery:	Lithium battery,6AH/6.4V		
LED light source:	Philips 3030SMD or Nichia 3030SMD		
CCT:	4000-6500K	Solar panel	Monocrystalline silicon solar panel
Power Factor:	≥0.90	Option:	MPPT control system
CRI:	≥80Ra	Charging time:	7-12 hours
Beam angle:	70*150°	Working time:	3-5 days (cloudy or raining day)
Working temp.:	-15°C ~+50°C	Lifespan:	≥50,000 Hours
Storage temp.:	-30°C ~+65°C	Warranty:	3 years for lamp / 2 years for battery, 10 years for solar panel
Housing material:	Die-casing Aluminum	IP rate:	IP65
Fonctionnement : les premiers 4 heures - 100%, les 4 heures restants - 50% et les 4 heures restants - 25%			


Dimension:

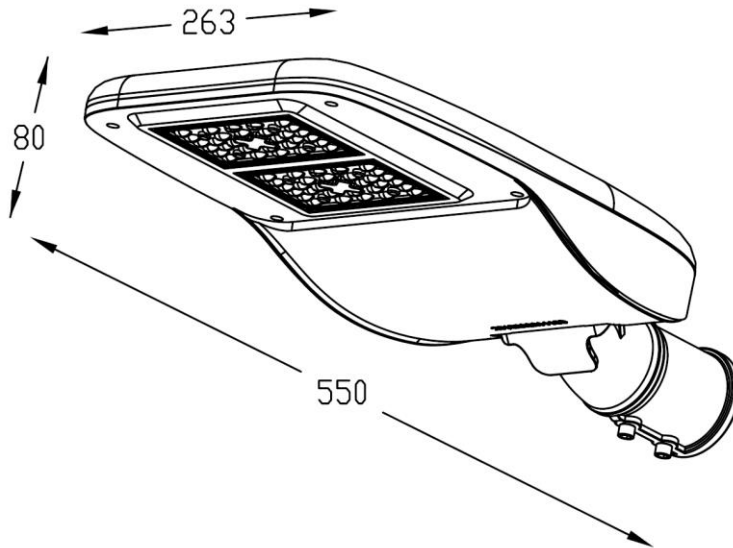

Photométrie du luminaire: DIAGRAMME

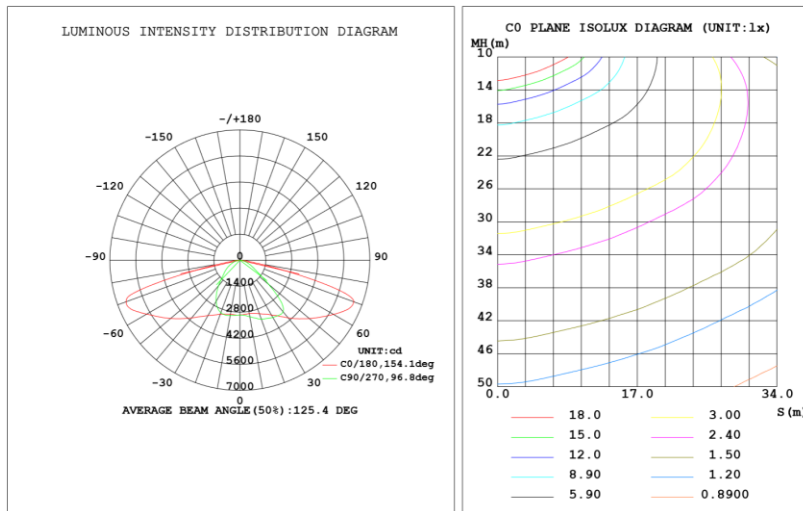

LUMIÈRE DE RUE ISOCANDELA

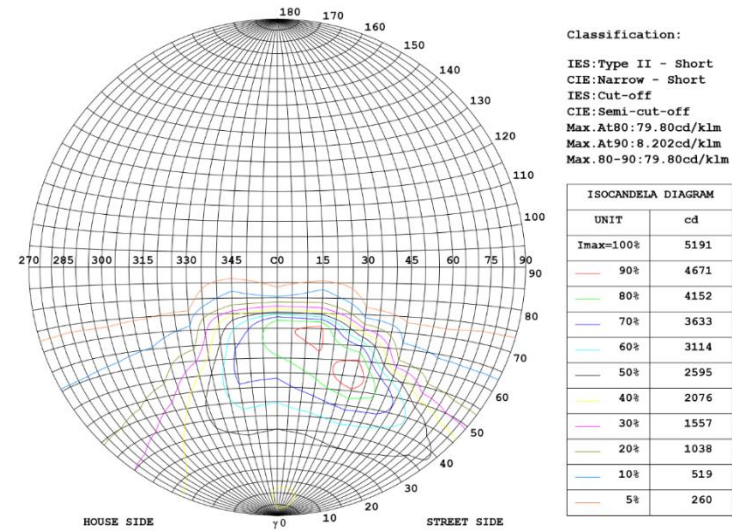

Protection avantages:



Applications:



Remarques:

- *Svp le faire installer par un professionnel.
- *Svp, vous assurer du bon voltage avant toutes installations.
- *Svp éteindre avant d'installer ou de changer de batteries.
- *Svp garder hors de la portée des enfants.